


Panasonic

Cell Type BK-3HCDE

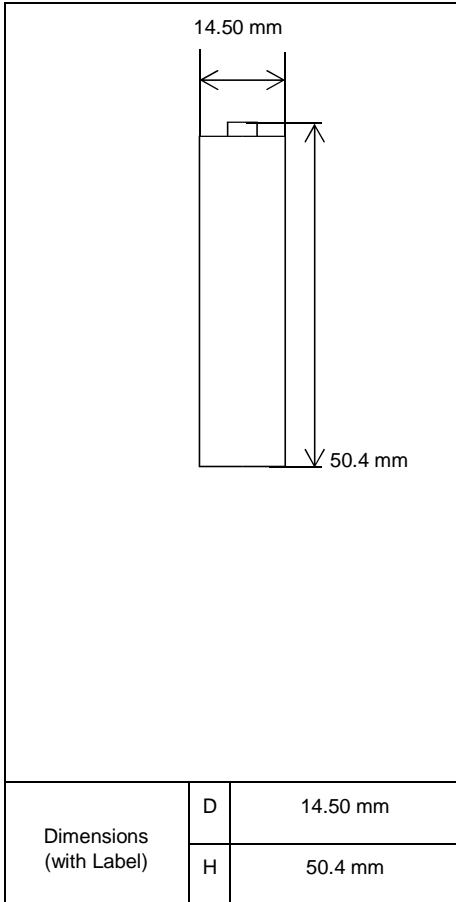

Type : Nickel-Metal Hydride Battery		Size : AA Consumer Type	
Country of origin		Japan	
Capacity ¹⁾	Minimum	2500mAh	
Nominal Voltage		1.2V	
Charging Current x Time		Fast Charge ²⁾	1250
Ambient Temp.	Charge Condition	Fast Charge ²⁾	0°C - 40°C
	Discharge Condition		0°C - 50°C
	Storage Condition	Less than 90days	-20°C - 40°C
		Less than 1year	-20°C - 35°C
Internal Impedance ³⁾ (after discharge to E.V.=1.0V)		Approx. 40mΩ (at 1KHz)	
Weight ⁴⁾		Approx. 30 g	
Size ⁴⁾ : (Diameter) x (Height)		φ :14.5mm X H:50.4mm	

To PECE

Specifications

1)Single cell capacity under the following condition.

Charge : 250mA x 16h, Discharge : 500mA(E.V.=1.0V) at 25deg.C 2)Use recommended charging system.

3)After a few charge and discharge cycles under the above 1) condition. 4)With Label.